



Industrial IoT Connectivity & Controls

VTL Brochure

Technical Documentation

662-438-3266 · dcon-rmc.com · sales@dcon-rmc.com

DCon — an RMC brand. This document is being rebranded; technical content remains current.



VTL

Patented* Visual Tank Level

Installs in Minutes

Visible Day/Night

Adaptive Colors

Segmented Levels

WiFi Connectivity



Contact us Today to Learn
More About this
Revolutionary
Patented* Technology!

833-467-3446
sales@reignrmc.com

*US Patents 12293653, D1000987, D1074483 and others pending patents world-wide


Visual and Detailed Information



Stand Alone VTL

- Operates from 24 volts DC
- Includes (1) 5 ft Light Bar (Base Unit)
- Add additional 5 ft Bars to 35 ft
- Includes a 24 volt DC Power Supply
- Connect via WiFi for more precise level information and set up

VTL-408384

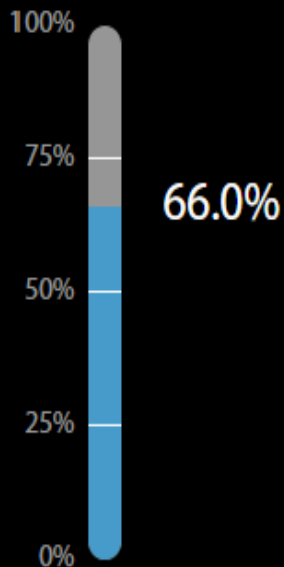

Sensor Input: 14.55 mA

TANK CONFIGURATION

TANK HEIGHT: 0 ft 0 in

TANK CAPACITY UNITS: Gal ▼

TANK CAPACITY @ 100%: 0

WiFi Configuration Tool

- Connect with the VTL via WiFi for configuration and application updates
- Determine color selection, marker, alert flashing and more
- Get current tank levels anytime without having to leave your vehicle



VTL Light Bars

- Powerful LEDs in connectable 5 ft sections
- Minimum of 1 5 ft section
- Up to 50ft with default power additional sections with power injector

reignrmc.com

833-467-3446

sales@reignrmc.com